


- KEY NOTES:**
- 1 NOT USED
 - 2 EGRESS STAIR
 - 3 FLOOR DRAIN
 - 4 PTAC UNIT
 - 5 ICE MACHINE LOCATION: PROVIDE FLOOR DRAIN CENTERED UNDER
 - 6 WIRE SHELVING SYSTEM - REFER TO FFAE
 - 7 FIRE EXTINGUISHER
 - 8 MEMBRANE ROOF OVER RIGID INSULATION, TOP CHORD OF TRUSS IS SLOPED TOWARD CENTER OF BUILDING

HOLIDAY INN EXPRESS
 18737- White Hall,
 Arkansas

Project Manager
 RK PATEL DESIGN
 &
Project Architect
 Ben Cortez, AIA

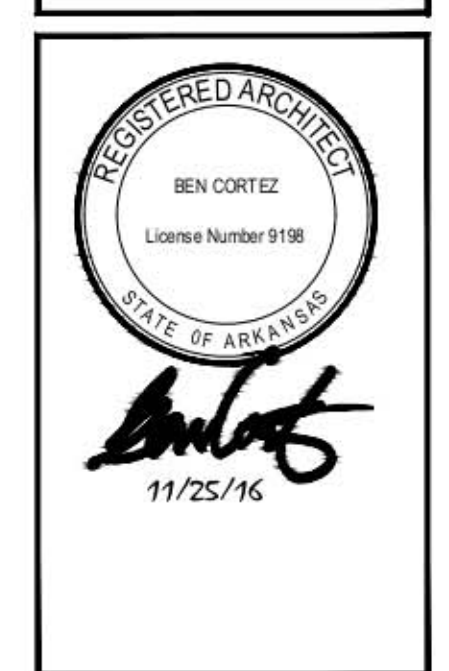

OWNER
 Umesh Patel
 3925 McCain park Dr
 North Little Rock
 Arkansas 72116

HOLIDAY INN EXP
 7810 Sheridan Rd
 Whitehall, Arkansas-71602

- 2x6x9 ext front & back walls w/ 5/8 gwb, R19
- 2x6x9 ext 12oc end walls w/ 5/8 gwb, R19
- 2x6x9 ext 12oc MR 1 side end walls w/ 5/8 MR 1 side R19
- 2x6x9 ext stairwell end walls, 2 layers FR5/8 C Core, R-19
- B stairway- (2) 2x6x9 int walls 12oc w/ (3) layers FR 5/8 C core, (2) layers 5/8 Densarmor Plus, RC 12oc, 5 1/2 sound batt
- B1 stairway/ elev- 2x6x9 int walls 12oc w/ (4) layers FR 5/8 C Core, RC 12oc, 5 1/2 sound batt
- E- 2 1/2" x 10' C-H shaftwall w/ 1" SLX liner panel, (2) layers 1/2 FR, batt insul
- C corridor/demising- 2x6x9 int wall w/ 5/8 FR both sides, 1/2 RC 18 ga. 24oc, 5 1/2 sound batt
- F corridor MR 1 side- 2x6x9 int walls w/ 5/8 FR 1 side, 5/8 FR MR 1 side, 5 1/2 sound batt
- F- 2x6x9 int walls w/ 5/8 FR both sides, 5 1/2 sound batt
- F corridor MR 1 side- 2x6x9 int walls w/ 5/8 FR 1 side, 5/8 FR MR 1 side, 5 1/2 sound batt
- G- 2x6x9 int walls w/ 5/8 gwb both sides
- C corridor/demising MR both sides- 2x6x9 int wall w/ 5/8 FR MR both sides, 1/2 RC 18 ga. 24oc, 5 1/2 sound batt
- C corridor/demising MR 1 side- 2x6x9 int wall w/ 5/8 FR MR 1 side, 5/8 FR 1 side, 1/2 RC 18 ga. 24oc, 5 1/2 sound batt
- 2x4x9 int walls MR 1 side, 3 1/2" batt
- 2x4x9 int walls MR both sides, 3 1/2" batt
- 2x4x9 int walls, 3 1/2" batt
- 2x6x10 ext walls sheathing only 1 side
- 2x8 SYP #2 Headers 3 Plies
- 5 1/4 x 11 7/8
- 2A RH
- 1A LH
- 235 LH
- 234 LH
- 232 RH
- 231 RH
- 10 risers, 4' wide (3) ply 2x12 stringers
- HU212-3
- A34 Clips

- 395.8 FT
- 71.8 FT
- 17.8 FT
- 42.5 FT
- 41.8 FT
- 67.1 FT
- 12.1 FT
- 700.0 FT
- 212.7 FT
- 57.1 FT
- 10.4 FT
- 33.2 FT
- 89.5 FT
- 8.7 FT
- 446.8 FT
- 41.8 FT
- 131.2 FT
- 33.8 FT
- 89.4 FT
- 274.7 FT
- 1.0 EA
- 1.0 EA
- 1.0 EA
- 1.0 EA
- 1.0 EA
- 1.0 EA
- 4.0 EA
- 12.0 EA
- 12.0 EA

UNITS:	1ST FLR	2ND FLR	3RD FLR	4TH FLR	TOTAL	
KING	5	7	6	7	25	king 36
KING SUITES	0	3	3	2	8	
ACCESSIBLE KING WITH SHOWER	1	0	1	0	2	
ACCESSIBLE KING SUITE	0	0	0	1	1	DB. Queen 39
DOUBLE QUEEN	0	9	9	9	27	
DOUBLE QUEEN SUITE	0	3	4	3	10	
ACCESSIBLE DOUBLE QUEEN SUITE	0	1	0	1	2	
TOTAL:	6	23	23	23	75	

(9) GUEST ROOM ARE REQUIRED TO HAVE HEARING IMPAIRED ALARM FEATURES (SEE PLANS FOR LOCATIONS)

- SYMBOL / FIXTURES KEY:**
- ADAAG ACCESSIBLE ROOM
 - ADAAG HEARING IMPAIRED ROOM - REFER TO 15JH4.05 FOR POWER & SIGNAL
 - MAGNETIC DOOR HOLD OPENER TIED TO BUILDING ALARM SYSTEM - REFER TO DOOR SCHEDULE, ELEC. & ALARM DRAWINGS
 - EXTERIOR FLUORESCENT FLOODLIGHT

GENERAL NOTES THIS SHEET:

- REFER TO ENLARGED GUEST ROOM PLANS FOR DOOR TAGS AND TYPES
- FIRE EXTINGUISHERS, SMOKE DETECTORS AND OTHER EMERGENCY DEVICES TO BE LOCATED PER LOCAL CODE. FIRE EXTINGUISHER LOCATIONS WITHIN THE PUBLIC SPACE SHALL BE CONTAINED WITHIN FULLY RECESSED CABINETS
- ROOF SLOPES AND NUMBER OF ROOF DRAINS PER LOCAL BUILDING CODES

Revisions:

Drawn By: CP
 Checked By: RM
 Issue Date:
 Project No:

Sheet Information:
2ND FLOOR PLAN
 Sheet No:
A2.02